

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C08K 7/28, C09D 123/02, 123/10 // (C09D 123/02, 123:16, 151:06, C08K 7:28)	A1	(11) International Publication Number: WO 97/28213	
		(43) International Publication Date: 7 August 1997 (07.08.97)	
(21) International Application Number: PCT/IB97/00202 (22) International Filing Date: 23 January 1997 (23.01.97) (30) Priority Data: MI96A000165 31 January 1996 (31.01.96) IT (71) Applicant: MONTELL NORTH AMERICA INC. [US/US]; Three Little Falls Centre, 2801 Centerville Road, Wilmington, DE 19850-5439 (US). (72) Inventors: RIGOSI, Gian, Luigi; Via Pomposa, 40, I-44100 Ferrara (IT). MARZOLA, Roberto; Via Mario Azzi, 34, I-44100 Ferrara (IT).		(81) Designated States: AU, BR, CA, MX, NO, RU, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(54) Title: POLYOLEFIN COMPOSITION SUITED FOR METAL COATING BY FLAME SPRAYING			
(57) Abstract Polyolefin compositions in powder form suited for metal coating, comprising (percentage by weight): 1) from 1 % to 40 % of hollow microspheres; 2) from 60 % to 99 % of a composition comprising: a) from 25 % to 95 % of polypropylene, polyethylene or crystalline propylene copolymers or mixtures thereof; b) from 0% to 70 % of an elastomeric copolymer; c) from 0.5 % to 10 % of propylene or polyethylene modified with polar groups; d) from 0 % to 10 % of titanium dioxide.			

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

"POLYOLEFIN COMPOSITION SUITED FOR METAL COATING BY FLAME SPRAYING".

The present invention concerns a polyolefin composition in powder form filled with hallow microspheres, adequate for the use in processes for the coating of metallic surfaces by way of flame-gun spraying.

Published European patent application No. 603 906 describes polyolefin compositions in powder form comprising a crystalline propylene homopolymer or a crystalline propylene random copolymer, an ethylene-propylene or ethylene/1-butene elastomeric polymer, polypropylene modified with polar groups, and optionally a nucleating agent and titanium dioxide.

Said compositions, having a melt index ranging from 15 to 150 g/10 minutes, are adequate for use in processes for the coating of metallic surfaces by using various techniques, among which is flame-gun spraying.

Spraying techniques using flame guns or sprayers allow one to obtain coatings with various degrees of thickness, and generally comprise two stages:

- 1) heating the metallic surface using a flame or other technique;
- 2) spraying the polyolefin composition powder while maintaining the flame lit.

However, penetration resistance of the coating obtained with the above mentioned compositions is not particularly high, and for some applications, such as the anticorrosion coating of underground or underwater pipes, it is inadequate.

On the other hand, it is known that the penetration resistance can be improved by adding to polyolefins the proper

quantity of hallow microspheres, such as glass microspheres. In particular, published European patent application No. 473 215 describes the preparation of polyolefin compositions containing the above microspheres by treating said microspheres with a degradation agent of the polyolefin chain, and the subsequent mixing with the polyolefins.

The compositions thus obtained are used, among other things, for coating steel pipes by way of extrusion, or wrapping the pipes with a preformed tape.

Compared to the above mentioned technical solution, the polyolefin compositions in powder form of the present invention have the advantage of not requiring any treatment of the microspheres in order to obtain coatings with good physical-mechanical properties. Moreover, flame-gun spraying is easier to apply on the field compared with the extrusion coating techniques, for repairing sections of coating that were either damaged or removed during the application process for example.

Flame-gun spraying is also much less complex in terms of apparatus and operations when compared to the wrap coating with preformed tapes.

Published patent application WO 93/19927 describes an extrusion process for the preparation of insulating material comprising the following stages:

- a) a first stage of where a thermoplastic resin, such as polypropylene for example, is fluidized;
- b) a second stage where hallow microspheres are added under low shear stress conditions to the fluidized resin of the first stage.

The above mentioned insulating materials can be applied to the outside surface of pipes by way of extrusion or wrapping with ribbons of other preformed materials which are essentially made of the product obtained in stage b).

The extrusion coating technique is not described in details in the above mentioned patent application, however, since the use of low shear stress in stage b) is necessary in order to avoid breaking the glass microspheres, it is inevitable that said procedure must also be followed during the extrusion coating.

In addition, as shown in published european patent application No. 473 215, coating pipes by way of extrusion is a process that normally requires high shear stress values, therefore said technique can be incompatible with the composition described in application WO 93/19927.

Moreover, patent application WO 93/19927 clearly states that extrusion coating requires the use of molds into which the melted polymer composition is conveyed.

In any case it is inevitable that the extrusion phase used for coating the pipes will cause a degradation of the properties of the material used for said coating, due to the additional breakage of the hallow microspheres and the further degradation of the melted polymer.

On the other hand, the polyolefin compositions in powder form of the present invention are applied to the metal surface simply by way of flame-gun spraying with no need for complicated apparatus, such as extrusion plants and molds where the molten material must be introduced, as well as particularly delicate operating conditions, such as having to use low shear stress.

Moreover, applying the compositions of the present invention by way of flame-gun spraying allows one to obtain finished coatings having good physical-mechanical properties, as will be illustrated in the examples. On the other hand, the technical solutions described in the above mentioned documents of the prior art are limited to the preparation of insulating compositions having good physical-mechanical properties, leaving unresolved the problem of how to avoid the degradation of said properties following the application of the insulating compositions on the surface to be coated.

Considering the complexity of the technical solutions of the prior art, which leave unresolved the above mentioned problem, it is particularly surprising that using the coating compositions and process of the present invention one can obtain finished coating with good physical-mechanical properties without using complicated apparatus or having to take burdensome measures, such as pretreating the hallow microspheres.

Therefore, object of the present invention is a polyolefin composition comprising (percentages by weight):

- 1) from 1% to 40%, preferably from 10% to 25%, of hallow microspheres;
- 2) from 60% to 99%, preferably from 75% to 90%, of a polyolefin composition comprising (percentages by weight):
 - a) from 25% to 95%, preferably from 50% to 90% of polypropylene homopolymer, polyethylene homopolymer, or a propylene/ethylene, propylene/C₄-C₁₀ α -olefin, or propylene/ethylene/C₄-C₁₀ α -olefin crystalline random copolymer, or mixtures thereof;

- b) from 0% to 70%, preferably from 5% to 34%, of an ethylene-propylene or ethylene/C₄-C₁₀ α -olefin elastomeric copolymer, optionally containing minor quantities of a diene;
- c) from 0.5% to 10%, preferably from 2% to 6%, of polypropylene or polyethylene modified with polar groups in quantities ranging from 0.1% to 10%, preferably from 0.2% to 5%;
- d) from 0% to 10%, preferably from 0.6% to 10%, of titanium dioxide;

said polyolefin composition 2) having MFR (ASTM D-1238, condition L) from 2 to 150 g/10 min., preferably from 4 to 30, more preferably from 4 to 12 g/10 min., and being in powder form with not more than 3% of the granules having a diameter greater than 600 micrometers.

Examples of C₄-C₁₀ α -olefins optionally present in components a) and b) are: 1-butene; 1-hexene; 1-octene; 4-methyl-1-pentene; 6,6-dimethyl-1-pentene.

Examples of dienes optionally present in component b) are: butadiene; 1,4-hexadiene; 1,5-hexadiene, and ethylenedene-1-norbornene.

The quantity of C₄-C₁₀ α -olefins in component a), when present, generally ranges from 2% to 10% by weight.

Examples of preferred polymers for component a) are:

- i isotactic polypropylene, having an isotactic index up to 99;
- ii propylene/ethylene crystalline random copolymers having an ethylene content ranging from 1% to 7% by weight, more preferably from 2% to 4.5%;

- iii propylene/ethylene/1-butene crystalline random copolymers with a content of ethylene ranging from 1.5% to 3% by weight, more preferably from 2% to 2.2%, and a 1-butene content from 4% to 10% by weight;
- iv HDPE and LDPE polyethylene.

Examples of preferred polymers for component b) are the ethylene/propylene or ethylene/C₄-C₁₀ α -olefin elastomeric copolymers having a content of propylene or C₄-C₁₀ α -olefin ranging from 30% to 80% by weight.

The dienes, when present in component b), are generally in quantities ranging from 1 to 10% by weight.

The elastomeric copolymers comprised in component b) can be added to the polyolefin composition as is, or as a masterbatch, for example using a propylene/ethylene or propylene/ethylene/1-butene heterophasic copolymer comprising a polypropylene matrix of the same type as component a), and an elastomeric copolymer of the type of component b).

Heterophasic copolymers can be obtained by way of mixing the matrix and the elastomeric copolymer in the molten state, or directly in synthesis by way of sequential copolymerization with high-yield and highly stereospecific Ziegler-Natta catalysts.

Component c) is preferably a polypropylene or polyethylene with various degrees of crystallinity, modified with maleic anhydride or isophorone bismaleamic acid, or acrylic acid. The modification is obtained by operating according to known methods, mixing, in the solid state, in solution, or in the molten state, the polypropylene or polyethylene and the modifying agent, preferably in the presence of radical initiators, such as organic peroxides.

The polyolefin composition 2) is generally prepared by coextruding the various components. For this purpose one uses single-screw or twin-screw extruders of a known type, operating at a temperature that allows one to obtain a fluid mass capable of being extruded. Generally speaking the extrusion temperature ranges from 170°C to 230°C.

In order to obtain the above mentioned MFRL values, in particular values greater than 12 g/10 min, it may be advantageous to add a free radical generator in extrusion, preferably an organic peroxide. Examples of organic peroxides are: 1,1-bis(tert-butyl peroxy)3,5,5-trimethyl cyclohexane; tert-butyl perbenzoate; 2,2-bis(tert-butyl peroxy)butane; dicumyl peroxide; di-tert-amyl peroxide; di-tert-butyl peroxide; 1,3-bis(tert-butyl peroxyisopropyl)benzene; 2,5-dimethyl-2,5-bis(tert-butyl peroxy)hexane.

The free-radical generators, when required, are generally used in quantities ranging from 0.01% to 0.2% by weight with respect to the sum of components of a), b), and c).

The pellets obtained from the extrusion must then be reduced to a powder having the above mentioned particle size distribution. For this purpose one uses known operation techniques, particularly cryogenic milling, using mills that are cooled with liquid nitrogen, for example. The formation of particularly fine fractions of powder during milling is not a disadvantage for the purpose of the present invention.

The polyolefin powder thus obtained is then mixed with the hollow microspheres in the weight proportions specified above.

The mixing is carried out according to known methods, using dry mixers, such as rotating drum mixers, Battagion mixers, or fluid bed plants.

It has also been found that in cases where high resistance to aging induced degradation is required by the coating, particularly in the case of coatings for pipes destined for hot fluids, it is best to add to the polyolefin composition 2) a stabilizing formulation that is capable of conferring to the above mentioned polyolefin composition oxidation induction time (O.I.T.) values, measured at 220°C at an oxygen pressure of about 1200 mbar, greater than or equal to 25 minutes, preferably greater than or equal to 30 minutes.

In fact, it has surprisingly been found that by using for the flame-gun spraying powders of polyolefin compositions 2) having the above mentioned O.I.T. values, one obtains finished coatings where the polyolefin component maintains O.I.T. values virtually identical. Said coatings, therefore, maintain constant physical-mechanical properties even after prolonged periods of exposure to heat and oxidizing agents.

On the contrary, when less effective stabilizing formulations are used, thus obtaining polyolefin compositions 2) having O.I.T. values inferior to those previously mentioned, the finished coatings, prepared with said polyolefin compositions by way of flame-gun spraying, show a notable decrease in the O.I.T. values with respect to those of the powders.


As a consequence, the coatings' resistance to aging is further reduced after the flame-gun spraying.

O.I.T. values greater than 25 minutes under the above conditions can be obtained by combining known stabilizing additives in the proper quantity.


Examples of polyolefin compositions 2) having O.I.T. values greater than 25 minutes are those containing (percentages by weight):

- e) from 0% to 1.5%, preferably from 0.05% to 1%, of an organic phosphite or phosphonite or mixtures thereof;
 - f) from 0.8% to 2% of a thioester or an organic polysulfide or mixtures thereof;
 - g) from 0.45% to 1% of a phenolic stabilizer;
- the f/g weight ratio ranging from 0.8 to 4.5, preferably from 2 to 4.


Examples of organic phosphites that can be used as stabilizers e) according to the present invention are the compounds having the following general formulas:



where R_1 , R_2 , and R_3 , equal or different, are alkyl, aryl, or aralkyl radicals having from 1 to 18 carbon atoms;



where R_1 and R_2 , equal or different, are radicals having the meaning mentioned above; Q is a tetravalent alkyl radical;

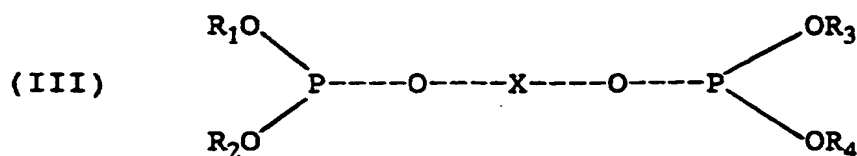


where R_1 , R_2 , R_3 , R_4 , equal or different, are alkyl, aryl, or aralkyl radicals having from 1 to 18 carbon atoms, X is an alkyl aryl, or aralkyl bivalent radical.

Examples of organic phosphites comprised in general formula (I) are described in U.S.A. patents 4187212, and 4290941.

Specific examples of compounds comprised in general formulas (I), (II), and (III) are:


tris(2,4 di-tert-butylphenyl)phosphite marketed by CIBA GEIGY under the trademark Irgafos 168; distearyl pentaerythritol diphosphite sold by BORG-WARNER CHEMICAL under the trademark Weston 618; 4,4'-butylidenebis(3-methyl-6-tert-butylphenyl-di-tridecyl)phosphite sold by ADEKA ARGUS CHEMICAL under the trademark Park P; tris(mononyl phenyl)phosphite; bis(2,4-di-tert-butyl)-pentaerythritol diphosphite, sold by BORG-WARNER CHEMICAL under the trademark Ultrinox 626.

Examples of organic phosphonites that can be used as stabilizers e) according to the present invention are the compounds of formula:

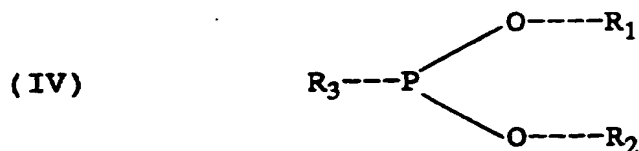

where R_1 , R_2 , and R_3 , equal or different, are alkyl, aryl, or aralkyl radicals having from 1 to 18 carbon atoms.

As an alternative the R_3 radical can be substituted with a

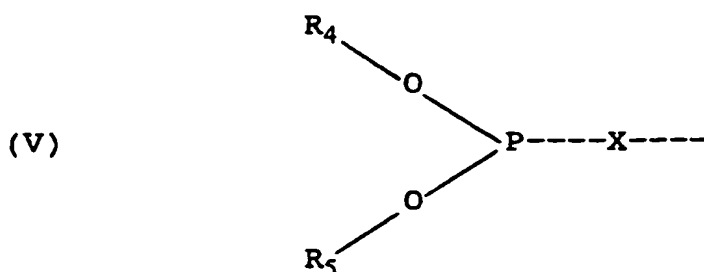


group, where R_4 and R_5 , equal or different, are alkyl, aryl, or aralkyl radicals having from 1 to 18 carbon atoms, and X is an alkyl, aryl, or aralkyl bivalent radical.

Examples of organic phosphonites comprised in general formula (IV) are described in GB patent No. 1372528.

A specific example of compounds comprised in general formula (IV) is the tetrakis(2,4-di-tert-butyl phenyl)4,4'-diphenylene diphosphonite, sold by Sandoz under the trademark Sandostab P-EPQ.


Examples of triesters that can be used as stabilizers f) according to the present invention are the compounds of general formula:

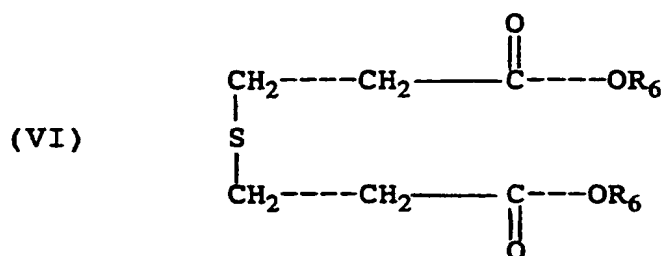

where the R_6 radicals, equal or different, are linear or branched C_6 - C_{20} alkyl radicals.

Examples of the thioesters comprised in general formula (VI) are the dilauryl thiodipropionate and the distearyl thiodipropionate.

An other example of thioester is the compound of formula



Examples of organic polysulfides that can be used as stabilizers f) according to the present invention are the compounds of general formula:




where the R_7 radicals, equal or different, are alkyl, aryl, or aralkyl radicals having from 1 to 20 carbon atoms.

Particularly preferred is the compound of formula (VII) where R_7 is a $\text{-C}_{18}\text{-H}_{37}$ radical, sold by Hoechst under the trademark HOSTANOX SE 10.

Examples of phenolic stabilizers that can be used as stabilizers g) according to the present invention are the compounds of formula

(VIII)



where R' is a -CHR_2 or -OR radical; the R radicals, both in formula (VIII) and in R' , equal or different, are hydrogen, or linear or branched C_{1-30} alkyl, C_{3-30} cycloalkyl, C_{6-30} aryl, C_{7-30} alkaryl or aralkyl radicals; C_{1-30} alkoxyl; one or more of said R radicals can optionally contain functional groups, in particular piperidine or -COOR'' , -O- , -S- , -NHR'' , -NHR''-NHR'' ,

-OR" groups, where R" is chosen from hydrogen or linear or branched C₁₋₃₀ alkyl, C₃₋₃₀ cycloalkyl, C₆₋₃₀ aryl, C₇₋₃₀ alkaryl or aralkyl radicals; or two or more of the R and R' radicals are bonded to form cyclic structures; provided that at least one of the two R radicals in position ortho with respect to the -OH group in formula (VIII) is different from hydrogen; or the phenolic stabilizers comprising two or more structural units of formula (VIII) where the R and R' radicals have the meaning described above, with the difference that at least one of them is substituted by a direct bond, or by a functional -O- or -S- group, or by a polyvalent C₁₋₃₀ alkyl radical, linear or branched; C₃₋₃₀ cycloalkyl, C₆₋₃₀ aryl; C₇₋₃₀ alkaryl or aralkyl radical, where said polyvalent radicals can optionally contain the above mentioned functional groups, and all the valences are saturated by structural units of formula (VIII).

Specific examples of the above mentioned phenolic antioxidants are: 2,6-di-tert-butyl-4-methylphenol; 2-tert-butyl-4,6-dimethylphenol; 2,6-di-tert-butyl-ethylphenol; 2,6-di-tert-butyl-4-i-amylphenol; 2,6-dicyclopentyl-4-methylphenol; 2-tert-butyl-4,6-diisopropylphenol; 2-tert-butyl-4,6-dioctadecylphenol; 2,6-di-tert-butyl-4-methoxymethylphenol; 2,5-di-tert-butylhydroquinone; 2,6-dicyclohexylhydroquinone; 2,6-di-tert-butyl-4-hexadecyloxyphenol; 4,4'-thiobis(6-tert-butyl-2-methylphenol); 2,2'-methylene-bis(6-tert-butyl-4-methylphenol); 4,4'-methylene-bis(2,6-di-tert-butylphenol); 1,1-bis(5-tert-butyl-4-hydroxy-2-methylphenyl)butane; 3(3,5-di-tert-butyl-4-hydroxyphenyl)propionate of methyl-

octadecyl; 3(3,5-dicyclohexyl-4-hydroxyphenyl)propionate of ethyl or octadecyl; 1,3,5-trimethyl-2,4,6-tris(3',5'-ditert-butyl-4-hydroxybenzyl)benzene; tetrakis[methylene(3,5-di-tert-butyl-4-hydroxyhydrocinnamate)]methane; 2,2-bis[4-(2(3,5-di-tert-butyl-4-hydroxycinnamoyloxy)ethoxyphenyl)]propane; pentaerythritol-tetrakis[3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionate].

The microspheres that are used in the compositions of the present invention can be made of plastic or inorganic materials.

Preferably they are made of inorganic glass, in particular silica or a mixture of silica, alkaline metal oxides, and B_2O_3 .

The density of the microspheres generally ranges from 0.05 and 0.6 g/cm³, preferably from 0.1 to 0.5 g/cm³.

The diameter of the microspheres generally ranges from 10 to 150 μm , preferably from 30 to 70 μm .

Known types of guns or sprayers are used for the flame-gun spraying.

Typically, said guns or sprayers have a central hole for spraying the powders and one or more circles of holes, for the flame, which are concentric to the central hole.

One can also feed inert gas, such as nitrogen for example, through said holes in order to protect the polymer from the oxidation caused by the flame.

The flame-gun spraying is carried out following known techniques.

As previously stated, said techniques generally comprise two stages:

- 1) heating the metallic surface with a flame or other heating devices, such as induction ovens for example;
- 2) spraying the polyolefin composition filled with microspheres while maintaining the flame lit.

In stage 1) the surface is brought to a temperature that ranges preferably from 150 to 270°C; in stage 2) one operates in a way that causes the total melt of the polymer mass. Preferably in stage (2) the polymer mass is brought to a temperature ranging from 180 to 230°C.

Should one want to obtain thick coatings (for example from 2 to 20 mm) it is possible to deposit a number of layers, equal or different, of the above mentioned polyolefin compositions.

Before depositing the polyolefin composition, the surface to be coated can be treated in a variety of ways, such as the removal of all greasy substances and encrustations, and sanding. In order to improve the adhesion it may also be of advantage to apply a primer to the metallic surface to be coated. Examples of said primers are epoxy resins, that can be applied by way of flame-gun spraying, or used in solution in the proper solvents, and the aqueous solutions of chromates (10% by weight, for example). In either case the solvent is removed with heat before depositing the polyolefin composition.

The above mentioned flame-gun spraying process is particularly suited for coating the outer surface of metal pipes, in particular steel pipes for oil pipe-lines, and pipes in general.

The following examples are given in order to illustrate but not limit the present invention.

The polyolefin composition 2) used for the coating of the examples comprises (percentages by weight):

- a) 73.52% of a propylene/ethylene/1-butene crystalline random copolymer containing 2% of ethylene and 8% of 1-butene;
- b) 19.5% of a masterbatch consisting of a heterophasic copolymer containing 50% of a crystalline propylene random copolymer comprising 3.5% of ethylene and 50% of an ethylene/propylene elastomer which contains 27% of ethylene;
- c) 3.4% of a propylene homopolymer modified with maleic anhydride, containing 1.5% of grafted maleic anhydride, and 0.3% of free maleic anhydride;
- d) 0.68% of TiO_2 ;
- f) 1.5% of dilauryl thiodipropionate;
- g) 1.4% of Irganox B 225.

The Irganox B 225 is a stabilizing composition containing 50% by weight of pentaerythrityl-tetrakis[3-(3,5-di-tert-butyl-4-hydroxyphenyl)]propionate (Irganox 1010), and 50% by weight of Sandostab P-EPQ, which is a stabilizer based of tetrakis(2,4-di-tert-butylphenyl)4,4'-diphenylilene diphosphonite.

The above mentioned polyolefin composition has a MFR (ASTM D1238, condition L) of 10g/10 min., and is a powder where not more than 3% of the granules by weight have a diameter greater than 600 micrometers.

Example 1

A filled composition is prepared by dry mixing 80% by weight of the polyolefin composition 2), and 20% by weight of hallow glass microspheres 1).

Glass microspheres 1) used are the Scotchlite B 38/4000, marketed by 3M Italia, having an average density of 0.38 g/cm^3 , and an average wall thickness of 1.07 micrometers. One proceeds with the coating of a steel plate which had been previously sanded, operating in the following manner:

- the steel plate is heated to 200°C on a heating plate;
- on the surface of the steel plate to be coated is applied, using an electrostatic gun, the powdered epoxy resin Scotchkote 226 N Slow marketed by 3M Italia;
- the filled composition is deposited on the epoxy resin coated surface in a number of consecutive layers, using a flame-spraying MINI-SPRAY-JET gun manufactured by UTP (Germany), until the thickness of the coating reaches about 5 mm.

The above mentioned gun has a central hole, from which the filled composition comes out, and a circle of holes, concentric to the central hole, which is where the flame comes out, said flame being fed by an oxygen/propane mixture. The temperature of the polymer mass during spraying is maintained at about 200°C .

The coating is subjected to a peeling test at 120°C . according to DIN 30678, obtaining a peeling value greater than 7N/mm.

Other properties of the coating are reported on Table 1.

Example 2

The operation takes place as in Example 1, with the difference that one uses a filled composition obtained by dry mixing 80% by weight of the polyolefin composition 2) described above, and 20% by weight of hallow glass Scotchlite K25

microspheres 1), having an average density of 0.25 g/cm^3 , and an average wall thickness of 0.95 micrometers.

The resulting coating has a thickness of 7-8 mm. The properties of said coating are reported in Table 1.

From the density values shown in Table 1 one can conclude that the majority of the glass spheres did not break. In fact the calculated density values for the coatings of Examples 1 and 2 are 0.71 , and $0.65 \text{ cm}^3/\text{g}$ respectively.

TABLE 1

	Ex. 1	Ex. 2
Density (g/cm^3)	0.77	0.71
Thermal conductivity (W/mK)	0.16	0.15
Penetration at 23°C (mm)	0.09	0.06
Penetration at 100°C (mm)	0.5	0.5
Compression module at 5% of deformation (MPa)	455	395

The properties reported in Table 1 are measured using the following methods.

Property	Method
Density	BS 4370
Thermal conductivity	ASTM C518
Penetration at 23°C and 100°C	DIN 30678
Compression module at 5% of deformation	ASTM D 695

Comparative Example 1

Polyolefin composition 2) described above is subjected to an induction oxidation time (O.I.T.) evaluation using the following method.

The surface of a steel plate is coated operating as in Example 1, but using the polyolefin composition 2) as is, i.e., without adding the hallow glass microspheres 1).

A sample of the coating obtained in this manner is taken after having detached it from the metal, and is then put into a test tube. Said test tube is connected to an apparatus that is capable of producing a vacuum, in order to eliminate the air, and then oxygen is introduced to build up the pressure in the test tube. In this case, after the vacuum is complete, pure oxygen is introduced in the test tube until a pressure of 1200 mbar is reached.

The test tube is then put in a thermostatic bath and heated.

Said test tube is connected to a pressure transducer that allows the registration of the oxygen pressure in function of the time.

Thus one obtains a pressure/time diagram that comprises two segments which are almost rectilinear:

- an initial segment slightly descending (the pressure initially undergoes a moderate decrease);
- a subsequent line rapidly descending with time.

By prolonging the above mentioned lines one reaches a point where said lines intersect, and at said point one can read in the diagram the oxidation induction time, that is to say the time when the polymer starts to absorb significant quantities of oxygen.

The above mentioned sample of polyolefin composition 2) of Examples 1 and 2 shows oxidation induction times of 72 minutes at 210°C, and 35 minutes at 220°C.

By carrying out the same test on the powder of composition (I) as is, i.e., without having been subjected to flame-gun spraying, one obtains oxidation induction times of 75 minutes at 210°C and 34 minutes at 220°C.

Therefore, it is clear that the above mentioned polyolefin composition is highly resistant to oxidation at high temperatures, and that said oxidation resistance is not substantially reduced after flame-gun spraying.

Comparative Example 2

One produces a polyolefin composition of the same type as the polyolefin composition 2) of Examples 1 and 2, with the difference that less quantities of components f) and g) are used. Said composition, therefore, comprises (percentages by weight):

- a) 75.3% of a propylene/ethylene/1-butene crystalline random copolymer containing 2% of ethylene and 8% of 1-butene;
- b) 20% of a masterbatch consisting of a heterophasic copolymer containing 50% of a crystalline propylene random copolymer comprising 3.5% of ethylene and 50% of an ethylene/propylene elastomer which contains 27% of ethylene;
- c) 3.5% of a propylene homopolymer modified with maleic anhydride, containing 1.5% of grafted maleic anhydride, and 0.3% of free maleic anhydride;
- d) 0.7% of TiO_2 ;
- f) 0.3% of dilauryl thiodipropionate;
- g) 0.2% of Irganox B 225.

The above composition has a MFR of 9 g/10 minutes, and is a powder where not more than 3% of the granules have a diameter greater than 600 micrometers.

By subjecting said composition to the test of comparative Example 1, one obtains an oxidation induction time at 200°C of 7.5 minutes for the sample deriving from the flame-gun spraying, and 20 minutes for the powder as is.

CLAIMS

1. A polyolefin composition comprising (percentages by weight):
 - 1) from 1% to 40% of hollow microspheres;
 - 2) from 60% to 99% of a polyolefin composition comprising (percentages by weight):
 - a) from 25% to 95% of polypropylene homopolymer, polyethylene homopolymer, or a propylene/ethylene, propylene/C₄-C₁₀ α -olefin, or propylene/ethylene/ C₄-C₁₀ α -olefin crystalline random copolymer, or mixtures thereof;
 - b) from 0% to 70% of an ethylene-propylene or ethylene/C₄-C₁₀ α -olefin elastomeric copolymer, optionally containing minor quantities of a diene;
 - c) from 0.5% to 10% of polypropylene or polyethylene modified with polar groups in quantities ranging from 0.1% to 10%;
 - d) from 0% to 10% of titanium dioxide;said polyolefin composition 2) having MFR (ASTM D-1238, condition L) from 2 to 150 g/10 min., and being in powder form with not more than 3% of the granules having a diameter greater than 600 micrometers.
2. The polyolefin composition of claim 1, where component a) comprises one or more polymers selected from the group consisting of:
 - i isotactic polypropylene, having an isotactic index up to 99;

- ii propylene/ethylene crystalline random copolymers having an ethylene content ranging from 1% to 7% by weight,
 - iii propylene/ethylene/1-butene crystalline random copolymers with a content of ethylene ranging from 1.5% to 3% by weight, and a 1-butene content from 4% to 10% by weight;
 - iv HDPE and LDPE polyethylene.
3. The composition of claim 1, where the hallow microspheres 1) have a density ranging from 0.05 to 0.6 g/cm³.
 4. The composition of claim 3, where the hallow microspheres 1) are made of inorganic glass.
 5. The composition of claim 1, where the polyolefin composition 2) has oxidation induction time values, measured at 200°C and at an oxygen pressure of about 1200 mbar, greater or equal to 25 minutes.
 6. The composition of claim 5, where the polyolefin composition 2) contains (percentages by weight):
 - e) from 0% to 1.5% of an organic phosphite or phosphonite or mixtures thereof;
 - f) from 0.8% to 2% of a thioester or an organic polysulfide or mixtures thereof;
 - g) from 0.45% to 1% of a phenolic stabilizer;the f/g weight ratio ranging from 0.8 to 4.5.
 7. A process for coating metallic surfaces comprising the flame-gun spraying of the compositions of claims 1 and 5 on the above mentioned surfaces.

8. A process for coating metal pipes, comprising the flame-gun spraying of the compositions of claims 1 and 5 on the outer surface of said metal pipes.
9. Metal pipes coated by using the process of claim 8.

INTERNATIONAL SEARCH REPORT

national Application No
PCT/IB 97/00202

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C08K7/28 C09D123/02 C09D123/10 //(C09D123/02,123:16,
151:06,C08K7:28)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 C08K C09D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 603 906 A (HIMONT INC) 29 June 1994 cited in the application see page 2, column 2, line 29 - page 3, column 4, line 53 see page 4, column 5, line 57 - page 4, column 6, line 16 ---	1-9
A	EP 0 575 012 A (SHELL INT RESEARCH) 22 December 1993 see page 3, line 9 - line 32 -----	1-9

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *&* document member of the same patent family

Date of the actual completion of the international search

12 June 1997

Date of mailing of the international search report

- 4. 07. 97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Schmidt, H

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 97/00202

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0603906 A	29-06-94	IT 1256234 B CA 2112086 A CN 1093618 A JP 7041724 A	29-11-95 24-06-94 19-10-94 10-02-95
EP 0575012 A	22-12-93	AU 4019193 A BR 9302396 A CA 2098792 A CN 1082485 A DE 69307027 D ES 2097437 T JP 6055609 A NO 932260 A US 5597522 A	23-12-93 11-01-94 20-12-93 23-02-94 13-02-97 01-04-97 01-03-94 20-12-93 28-01-97

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)